
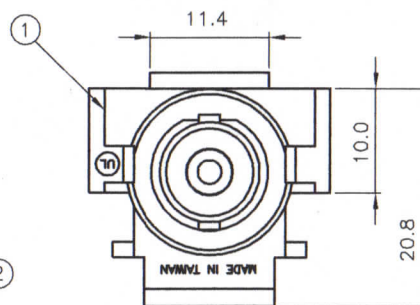
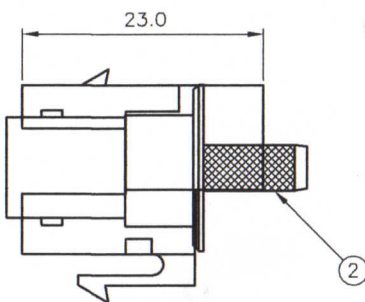



THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	08-01-2011	E.A.
	B	ADDED NOTES AND REDRAWN.	08-05-2011	E.A.

NOTES:

- 1. MATERIAL: HOUSING: ABS 94V-0
BNC CONNECTOR: BRONZE OR ZINC ALLOY
- 2. HOUSING COLOR: XX = IV, WH.
- 4. FINISH: BNC CONNECTOR: NICKEL PLATING 100u"

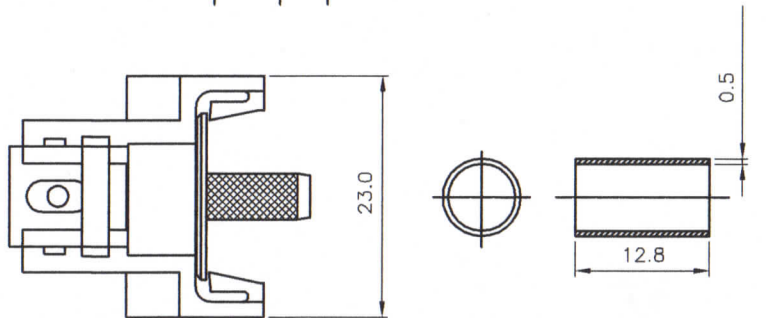

ITEM	DESCRIPTION	MATERIAL/FINISH	QTY	REMARKS
②	BNC CRIMPING	NICKEL PLATING	1	NL 100u"
①	HOUSING	ABS 94V-0	1	

ELECTRICAL

Impedance	50 ohm	75 ohm
Frequency Range	0-4GHz	0-1GHz
Working Voltage	500 Volts rms	500 Volts rms
Dielectric Withstanding Voltage	1500 Volts rms	1500 Volts rms
VSWR	1.3 max. 0-4GHz	1.05+0.1f(GHz)DCto1GHz
Contact Resistance	Center contact1.5milliohm Outer contact1.0milliohm	Center contact1.5milliohm Outer contact1.0milliohm
Insulation Resistance	5000 megohms (min)	5000 megohms (min)



e-mail.....sales@dynacomcorp.com
webwww.dynacomcorp.com

DIMENSIONS ARE SHOWN IN MILIMETERS.

NEXT ASSY: -	DRAWN: E.A. 08/01/2011	CHECKED: -
TITLE:	BNC Coupler Module	DWG. NO. 10600-BNCF-XX
		REV. B