


1 THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	07/25/2014	E.A.

### ISOMETRIC VIEW

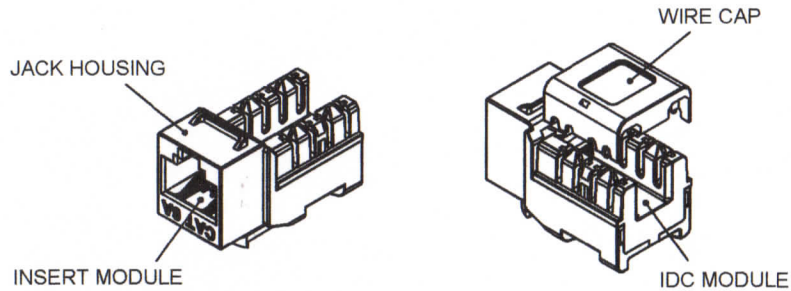

### TRANSMISSION PERFORMANCE

Meets all requirements specified in connecting hardware requirement of ANSI/TIA-568-C.2 Cat.6A

### ELECTRICAL

Electrical Insulation Resistance : 500 M $\Omega$  min. @ 100V d.c  
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute,

### MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum  
IDC Wire Gauge : 22 ~ 24 AWG


### PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0  
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold  
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy

### COMPATIBILITY

Jack installs to standard Keystone Port  
Compatible with Dynacom KwikTool P/N: 3190-KT

### ASSEMBLY DIMENSION

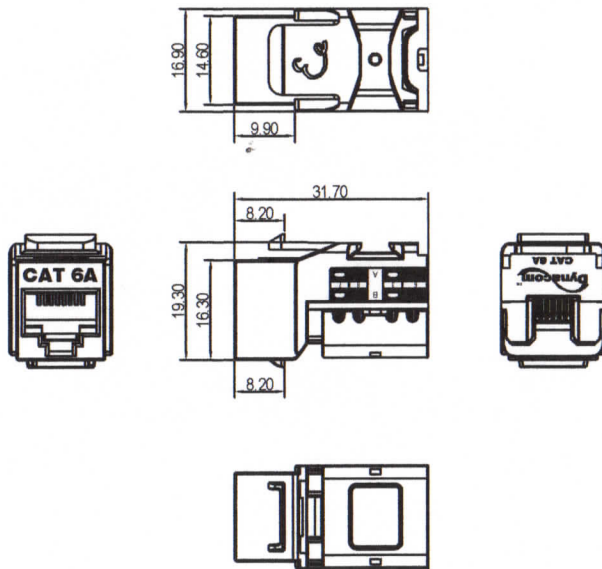

### COMPONENTS

ITEM	PART NAME	QTY
4	IDC MODULE	1
3	WIRE CAP	1
2	INSERT MODULE	1
1	JACK HOUSING	1



e-mail...sales@dynacomcorp.com  
www.dynacomcorp.com

TOLS ~ 20MM  $\pm$  0.2MM, OVER 20MM TO 60MM  $\pm$  0.4MM, OVER 60MM  $\pm$  0.8MM. ANGLES  $\pm$  1 DEG

NEXT ASSY: -	DRAWN: E.A. 07/25/2014	CHECKED: EA
TITLE	DWG. NO.	SHEET 1 OF 1
Jack Module Cat6A UTP 10G White	10606AK-WH	REV. A