

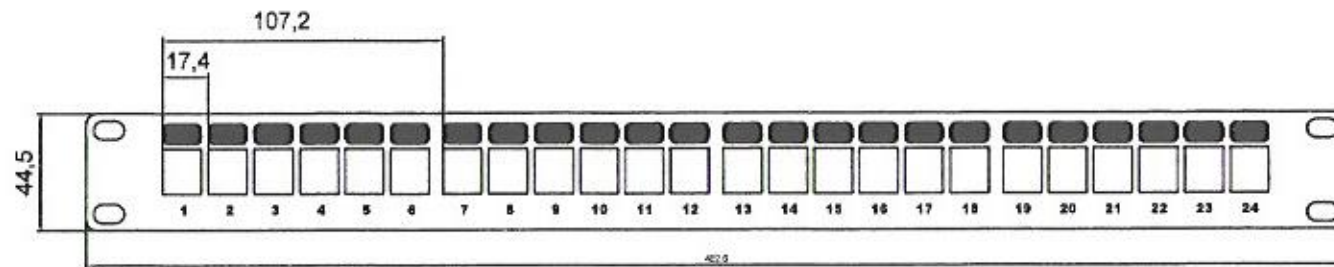


1 THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	04/18/2019	E.A.

Environmental Conditions  
 TEMPERATURE RANGE  
 STORAGE -40 to +70°C  
 OPERATIONAL -10 to +60°C  
 RELATIVE HUMIDITY (OPERATIONAL)  
 MAXIMUM NONCONDENSING 93%

PHYSICAL:  
 PANEL: SAE 1010, BLACK COATED.  
 MANAGEMENT  
 :HIGH-IMPACT,FLAME-RETARDANT  
 PLASTIC,UL94V-0 RATED.

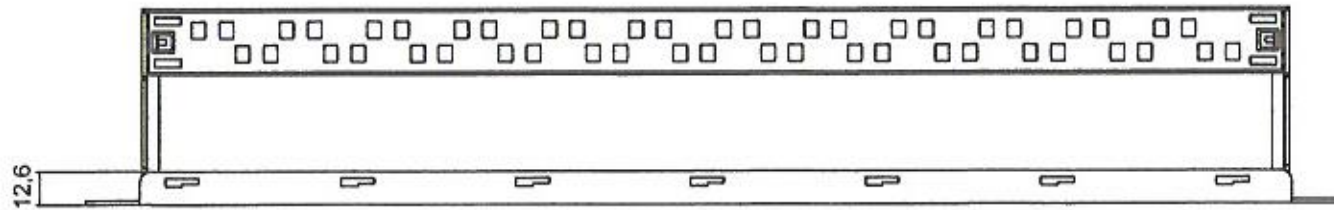


e-mail....sales@dynacomcorp.com  
 www.dynacomcorp.com

DIMENSIONS: INCHES			
NEXT ASSY: -	DRAWN: E.A. 04/18/2019	CHECKED: EA	
TITLE PATCH PANEL BLANK 24 PORT 1 RU		DWG. NO. 2013-24HD	SHEET 1 OF 1 REV. A

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	4/18/2019	E.A.
-	B			
-	C			
-	D			

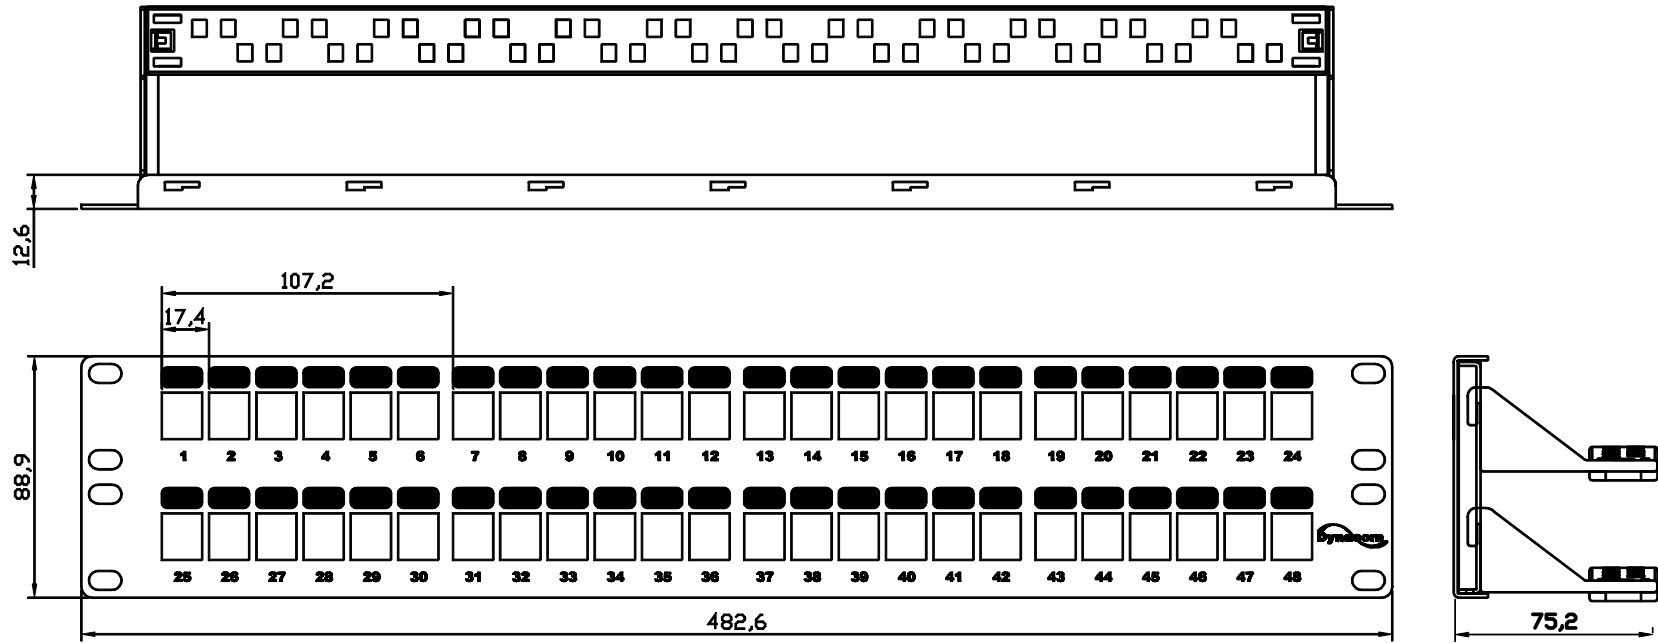

**Environmental Conditions**

TEMPERATURE RANGE  
 STORAGE -40 to +70°C  
 OPERATIONAL -10 to +60°C  
 RELATIVE HUMIDITY (OPERATIONAL)  
 MAXIMUM NONCONDENSING 93%

**PHYSICAL:**

PANEL: SAE 1010, BLACK COATED.  
 MANAGEMENT: HIGH-IMPACT, FLAME-RETARDANT  
 PLASTIC, UL94V-0 RATED.



e-mail...sales@dynacomcorp.com

www.dynacomcorp.com

DIMENSIONS: MM

NEXT ASSY: -

DRAWN: E.A.

CHECKED: A.L.

TITLE

PATCH PANEL BLANK 48 PORT 2RU

DWG. NO.

2013-48HD

SHEET 1 OF 1

REV.

A