


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	11/22/2013	E.A.

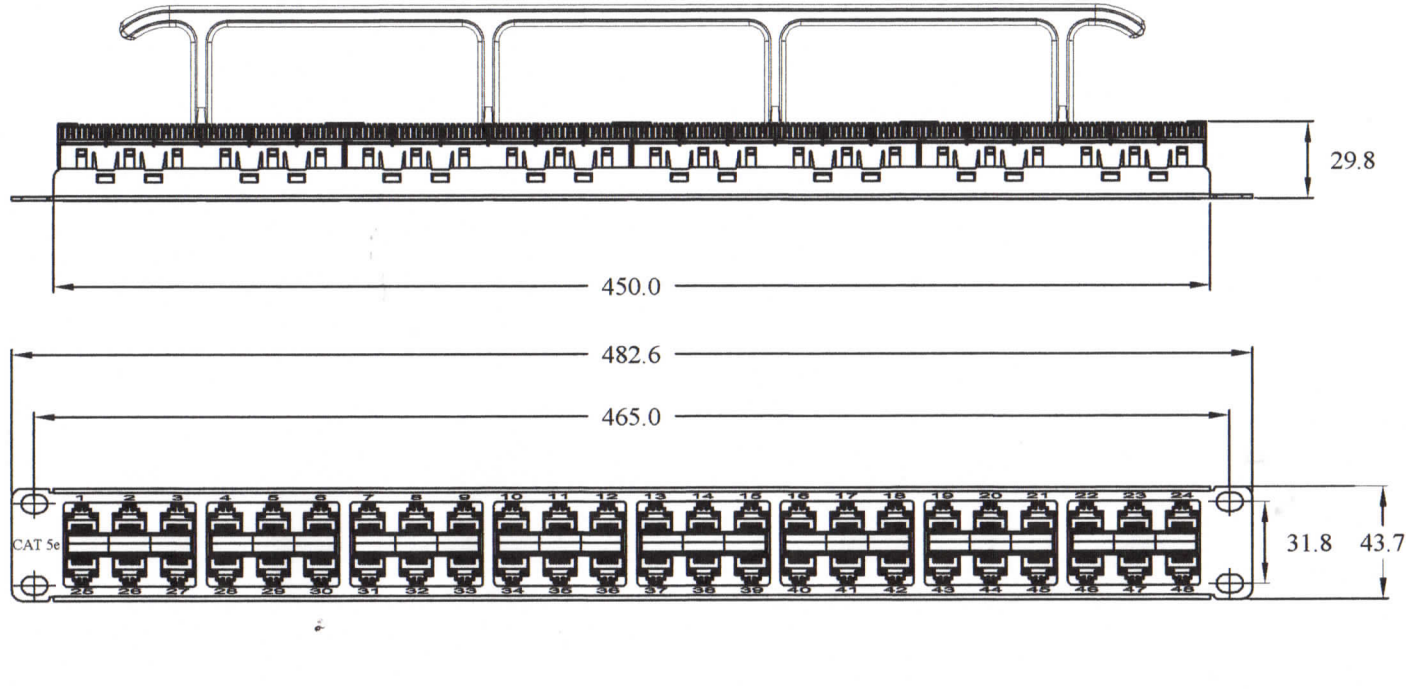

TRANSMISSION PERFORMANCE

Meets all requirements specified in connecting hardware requirement of TIA/EIA-568-B.2 Cat.5e

ELECTRICAL

Electrical Insulation Resistance : 500 M min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c or a.c. Peak Contact to Contact @ 60Hz for 1 minute

MECHANICAL

Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL

Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100 % Sn Alloy

DIMENSIONS ARE SHOWN IN MILIMETERS.



e-mail.....sales@dynacomcorp.com

webwww.dynacomcorp.com

NEXT ASSY: -

DRAWN: E.A. 11/22/2013

CHECKED: -

Ultra-High Density Cat5E Patch Panel

DWG. NO.

2013-48C5E1U

REV.

A