

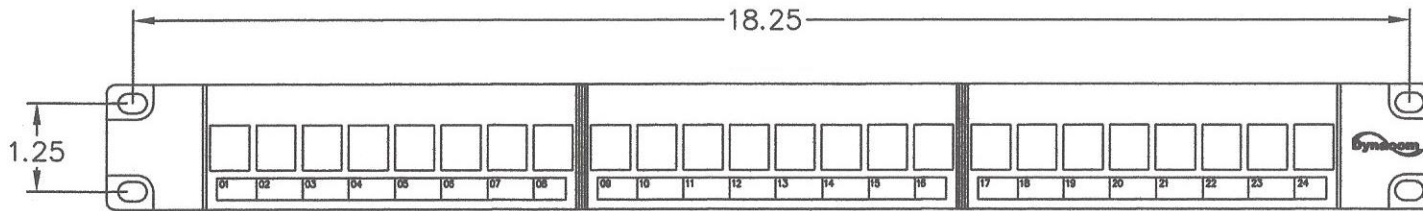


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	06-03-2010	E.A.

NOTES:

1. PATCH PANEL METAL- 0.066 THICK, POWDER COATED, FLAT BLACK.
2. PLASTIC FACEPLATES WITH APERTURES FOR 24 JACKS.
3. LABEL STRIP-QTY/3. NUMBERED 1 TO 24.
4. SCREW-QTY/4, 12-24 X 1/2 PHILLIPS PAN HEAD, BLACK (NOT SHOWN).
5. WIRE MINDER-QTY 1, PLASTIC COLOR-BLACK (NOT SHOWN).
6. TIE WRAPS-QTY/12.
7. INSTALLATION INSTRUCTION SHEET.

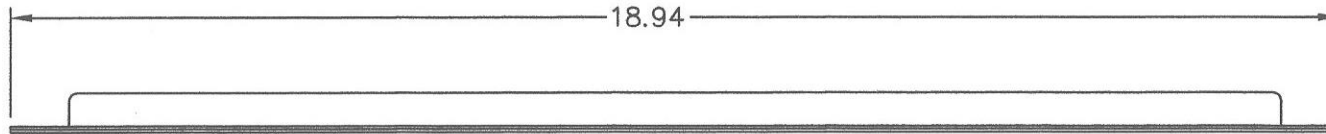

e-mail.....sales@dynacomcorp.com
 Hayward, California 94544

TOLS. .X=+/- 0.030, .XX=+/- 0.010, .XXX=+/- .005, ANGLES=+/-0.5 DEG.



NEXT ASSY: -	DRAWN: E.A. 06-03-2010	CHECKED: EL
TITLE: Blank Patch Panel, 24 Port 1 RU, w/Plastic Face.		DWG. NO. SHEET 1 OF 1 2013-24FP
		REV. A

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	06-03-10	E.A.

NOTES:

1. PATCH PANEL METAL- 0.066 THICK, POWDER COATED, FLAT BLACK.
2. PLASTIC FACEPLATES WITH APERTURES FOR 48 JACKS.
3. LABEL STRIP-QTY/6. NUMBERED 1 TO 48.
4. SCREW-QTY/8, 12-24 X 1/2 PHILLIPS PAN HEAD, BLACK (NOT SHOWN).
5. WIRE MINDER-QTY 2, PLASTIC COLOR-BLACK (NOT SHOWN).
6. TIE WRAPS-QTY/24.
7. INSTALLATION INSTRUCTION SHEET.

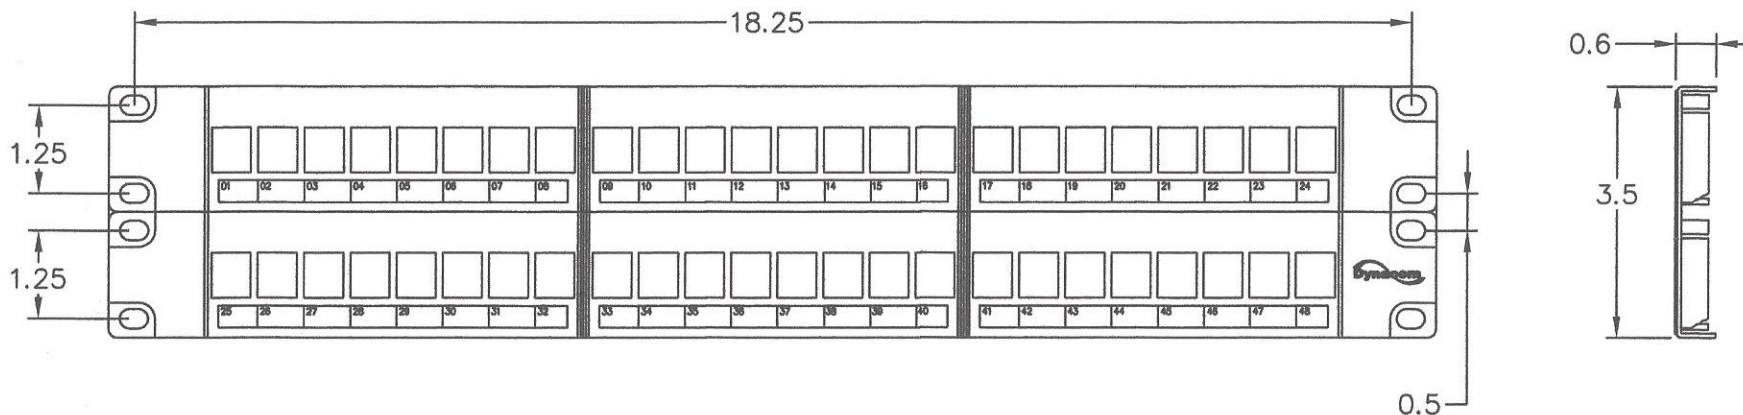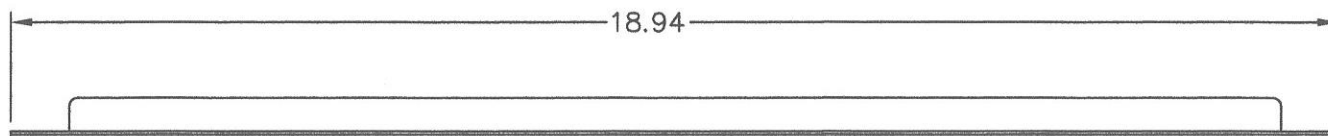

e-mail.....sales@dynacomcorp.com
 Hayward, California 94544

TOLS. .X=+/- 0.030, .XX=+/- 0.010, .XXX=+/- .005, ANGLES=+/-0.5 DEG.

NEXT ASSY: -	DRAWN: E.A. 06-03-2010	CHECKED: EL
TITLE: Blank Patch Panel, 48 Port 2 RU, w/Plastic Face.		DWG. NO. SHEET 1 OF 1 2013-48FP
		REV. A