


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	07/01/2015	E.A.

NOTES:

1. MATERIAL: PLASTIC BODY
2. QUANTITY PER PACKAGE: 1
3. APPLICATION: STRIPS PHONE AND DATA WIRE.
4. TYPE OF WIRE: SOLID AND STRANDED
5. CRIMPING CAPACITY: N/A

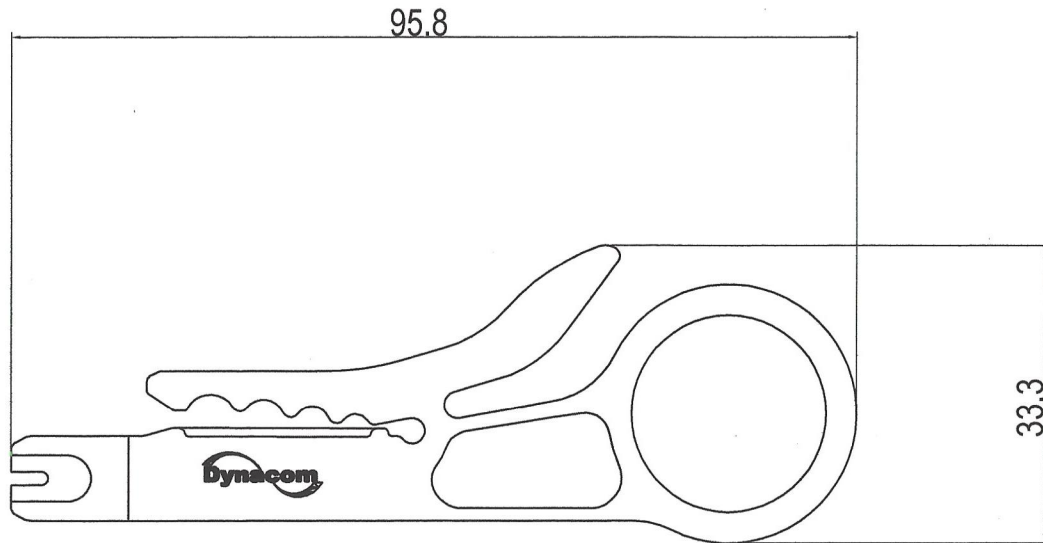

e-mail....sales@dynacomcorp.com
www.dynacomcorp.com

TOLS ~ 20MM ± 0.2MM, OVER 20MM TO 60MM ± 0.4MM, OVER 60MM ± 0.8MM. ANGLES ± 1 DEG

NEXT ASSY: -	DRAWN: E.A. 07/01/2015	CHECKED: EA
TITLE Ring Tool Jacket Stripper/Wire Insertion Tool	DWG. NO. 3180-DY	SHEET 1 OF 1 REV. A