


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	02/09/2009	E.A.

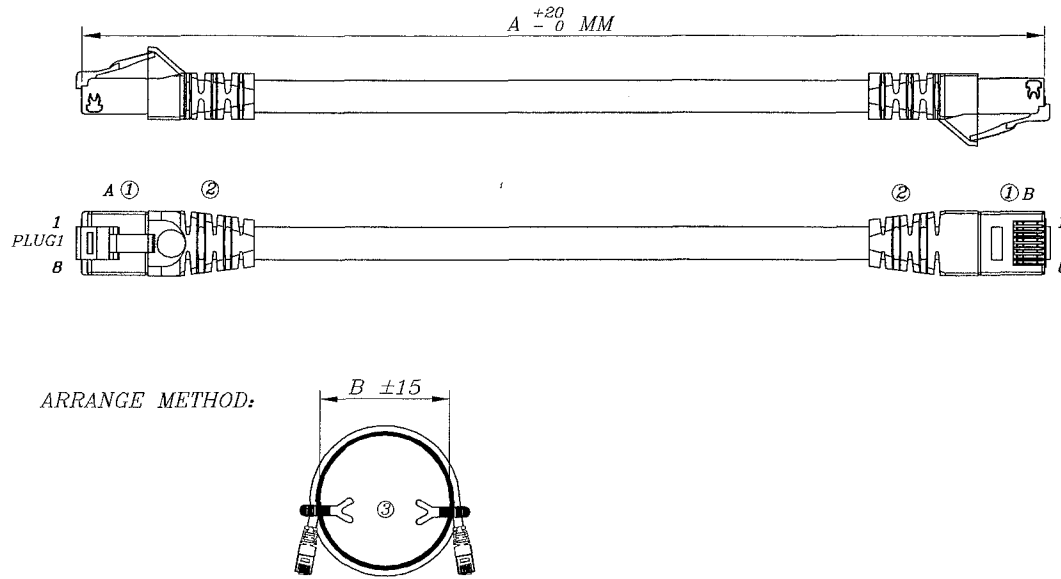

裁线长度标准 CUT LINE AND ARRANGE CRITERION				裁线长度标准 CUT LINE AND ARRANGE CRITERION			
序号 No.	线长 (MM) Total length (MM)	芯线 (MM) No. of passing rail (mm)	扎线长度 (MM) Cable tie (MM)	序号 No.	线长 (MM) Total length (MM)	芯线 (MM) No. of passing rail (mm)	扎线长度 (MM) Cable tie (MM)
1	300	/	/	19	13000		175
2	500	/	/	20	14000		180
3	1000	175	60	21	15000		205
4	1500		70	22	16000		210
5	2000		75	23	17000		215
6	2500		80	24	18000		220
7	3000	155	95	25	19000		225
8	3500		100	26	20000		235
9	4000		110	27	25000	120	265
10	5000		120	28	30000		315
11	6000		130	29	40000		365
12	7000		135	30	50000		415
13	7500	135	140	31	60000		465
14	8000		145	32	70000		515
15	9000		150	33	80000		565
16	10000		165	34	90000		615
17	11000	120	170	35	100000		665
18	12000		175	36			

项次 ITEM	品名 DESCRIPTION	规格 MATERIAL	颜色 COLOR	用量 Q'TY	项次 ITEM	品名 DESCRIPTION	规格 MATERIAL	颜色 COLOR	用量 Q'TY			
①	PLUG	P88R5E50V2NB	transparent	2	⑥							
②	PVC	70P	/	8g	⑦							
③	Cable tie	"C" MM	white	2	⑧							
④					⑨							
⑤					⑩							
线材规格 MATERIAL		线位 WIRE CONNECTION TABLE 颜色							裁线长度 LENGTH	合计 TOTAL	模号 MOLD NO.	
CAT.5E UTP PATCH CORD 24AWG		white/orange	orange	white/green	blue	white/blue	green	white/brown	brown	(A+20)*[19(0)]*[19(0)]	02-030	
		A1	A2	A3	A4	A5	A6	A7	A8			
		B1	B2	B3	B4	B5	B6	B7	B8			
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black		



email....sales@dynacomcorp.com  
web....www.dynacomcorp.com

ALL DIMENSIONS ARE IN MILIMETERS.

NEXT ASSY: -	DRAWN: E.A. 02/09/2009	CHECKED: -
TITLE: Cat 5E High-Density Patch Cords		REV. A


350EXX-XX

SUNF-FU TECHNOLOGY (SHENZHEN) CO., LTD

SPECIFICATION

PRODUCT	PART NO.	SHEET NO.	DATE
24AWG(7/0.20)x4P LAN CABLE	B008A121-W4C	A01188-A	03/09/2005

JACKET



TWISTED PAIR

1. PRODUCT DESCRIPTION

STRANDED BARE COPPER, POLYETHYLENE INSULATED, TWISTED PAIR CABLE FLAME RETARDANT INNOCUOUS PVC JACKET .

2. INSULATION:

CONDUCTOR	INSULATION		COLOR CODE
	MAT'L	O.D	
24AWG (7/0.20)	PE	0.97 ± 0.03mm	1P. BLUE & WHITE/BLUE 2P. ORANGE & WHITE/ORANGE 3P. GREEN & WHITE/GREEN 4P. BROWN & WHITE/BROWN

3. JACKET:

MAT'L	O.D	COLOR
FR-PVC	5.50 ± 0.20mm	NON-BRIGHTNESS GRAY (SUNF PL COLOR CODE:W4C)
MARKING	Exxxxx (FACTORY I.D.CODE) (UL) CM 75°C APR 24AWG CSA LLxxxxx CMG FT4 ETL & 3P VERIFIED TO TIA/EIA 568-B.2 ISO/IEC 11801 & EN50173 CAT. 5E - - - UTP	
FACTORY	LL6132276 =TAIWAN(TAOYUAN) CSA LL64151 = TAIWAN(TAOYUAN)	
I.D.CODE	E132276-A = CHINA(SHENZHEN LONGHUA) LL64151-A=CHINA(SHENZHEN LONGHUA) E132276-C = CHINA(DONG GUAN) LL64151-C=CHINA(DONG GUAN)	

4. STANDARDS & ELECTRICAL PROPERTIES :

- a. UL & CSA STYLE : (UL) CM & CSA CMG
- b. TEMPERATURE & VOLTAGE RATING : 75°C
- c. CONDUCTOR RESISTANCE : 89 OHMS/KM MAX. AT 20°C
- d. INSULATION RESISTANCE : 100M OHMS-KM MIN. AT 20°C
- e. DIELECTRIC STRENGTH : AC-500 V/1 MINUTE MIN.
- f. SPARK TEST : 2KV IN AIR.

APPROVED BY <i>Johnson</i>	CHECKED BY <i>MYRON</i>	DESIGNED BY <i>CHEV WEIKONG</i>
----------------------------	-------------------------	---------------------------------