


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	10/01/2021	E.A.
-	B			
-	C			
-	D			

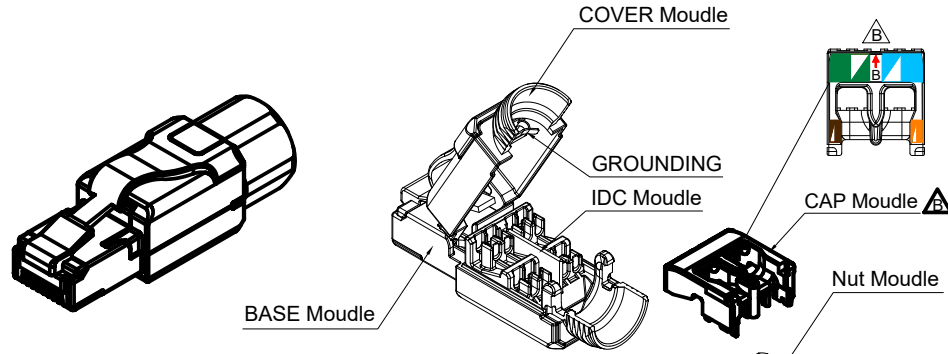

TRANSMISSION PERFORMANCE

When used with 10608-C8 and specified cables,
Meet all requirements specified in channel
requirement of
ISO/IEC 11801-1, Class I
ANSI/TIA-568.2-D, Category 8(30m configuration)

ELECTRICAL






Electrical Insulation Resistance : 500MΩ min. @100V d.c
Dielectric Withstanding Voltage : 1000V D.C or A.C Peak,
Contact to Contact; 1500V D.C or A.C Peak,
Contact to Shield @ 60Hz for 1 Minute.

MECHANICAL

IDC Wire Gauge : Re-usable IDC'S can be terminated
20 times with wires from 26 AWG through 22 AWG

PHYSICAL

Housing : Zinc-alloy fully shielded
Contact pin : Phosphor Bronze Alloy Plated With
50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100
micro-inch 100% Sn Alloy

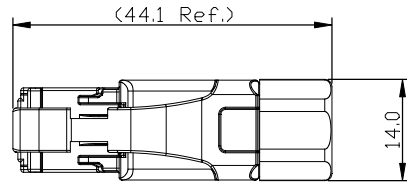

COMPONENTS

ITEM	PART NAME	MATERIAL	Q'TY
1	BASE Moudle	Zinc-alloy/Plastic	1
2	COVER Moudle	Zinc-alloy/Plastic	1
3	GROUNDING	SUS304	1
4	IDC Moudle	—————	1
5	Nut Moudle	Copper/Plastic (SMALL OD)	1
6	CAP Moudle	Plastic $\triangle B$	1
7	Wiring Lable	Paper $\triangle B$	1



e-mail...sales@dynacomcorp.com

www.dynacomcorp.com

DIMENSIONS: MM

NEXT ASSY: -

DRAWN: E.A.

CHECKED: EA

TITLE
CAT8 PLUG OD 6.0-8.0

DWG. NO. SHEET 1 OF 1
400PS-C8A

REV.
A