
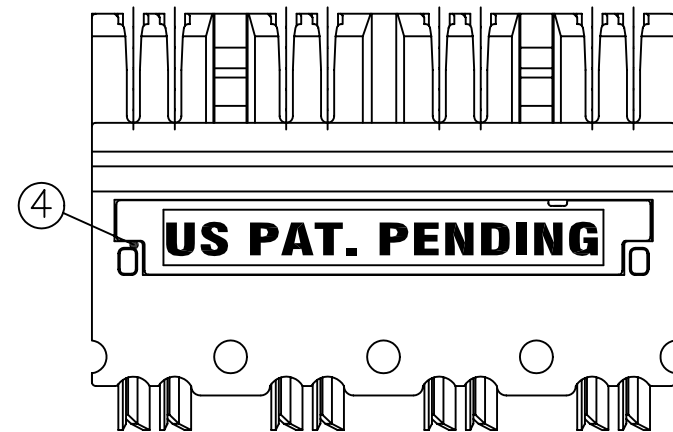
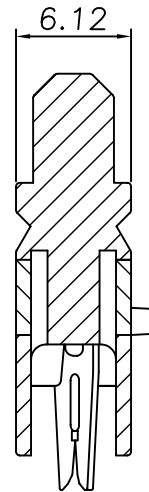
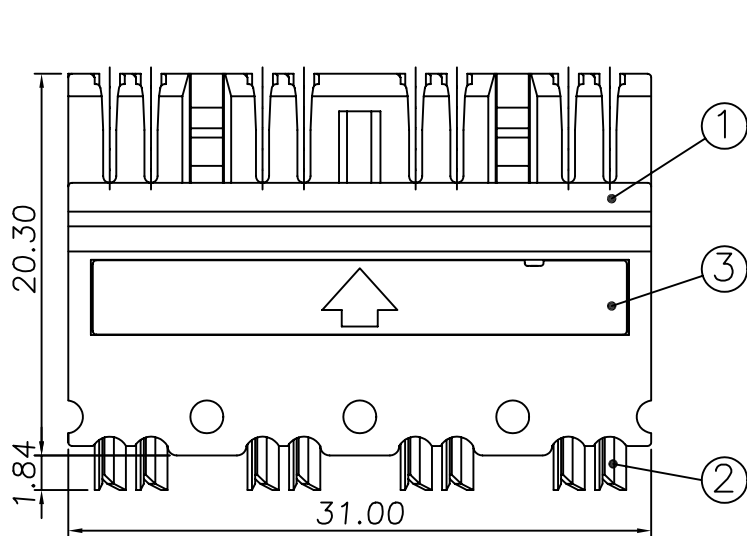


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	12/03/08	E.A.

NOTES:

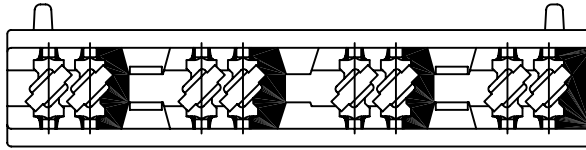

Environmental Conditions
 TEMPERATURE RANGE
 STORAGE -40 to +70°C
 OPERATIONAL -10 to +60°C
 RELATIVE HUMIDITY (OPERATIONAL)
 MAXIMUM NONCONDENSING 93%

PHYSICAL:
 HOUSING: PC UL94V-0
 IDC TERMINAL MATERIAL:
 Phosphor Bronze alloy plated with 100 micro-inch Sn.
 Planted with 100% Tin.Mist

ELECTRICAL:
 ELECTRICAL INSULATION RESISTANCE:10 MEGAOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE:1,000
 VOLTS,RMS,60HZ,1 MIN.
 CONTACT RESISTANCE:20 MILLIOHMS MAX.
 CURRENT RATING:1.5 AMPS AT 20°C

4	TERMINAL INSERT B	1	P1656(LP1748A)
3	TERMINAL INSERT A	1	P1656(LP1748)
2	IDC TERMINAL	8	M0833(LT0400)
1	TERMIANL HOUSING	1	P1648(LP1747)
No#	Description	Q'TY	Dwg No#(P/N)



e-mail.....info@dynacomcorp.com
 31082 San Antonio Street
 Hayward, CA 94544

TOLS. .X=+/- 0.030, .XX=+/- 0.010, .XXX=+/-0.005, ANGLES=+/-0.5 DEG.

NEXT ASSY: -	DRAWN: E.A. 12/03/08	CHECKED: Joe Tornello
TITLE: Connecting Clip, 110 Cat6, 4 pair	DWG. NO. 610C-4	SHEET 1 OF 1 REV. A