


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION, AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION FROM DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	RELEASED.	09/16/08	E.A.

D
C
B
A

D
C
B
A

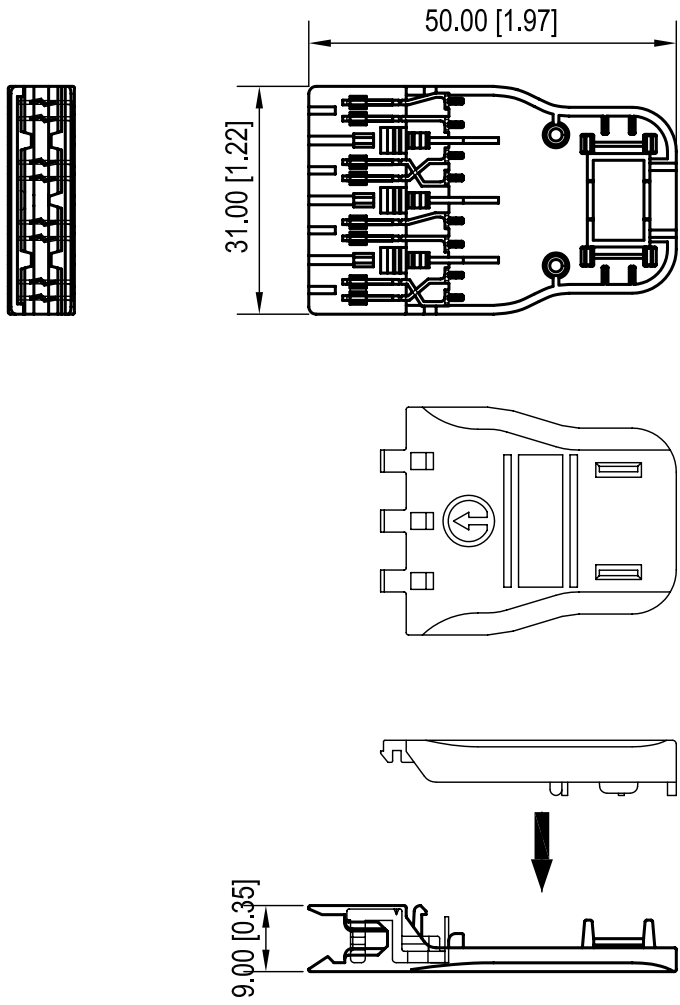

Transmission Data:

Return Loss
 from 1 to 20 MHz >35 dB
 from 20 to 100 MHz >20 dB

Electrical Data:

Dielectric Strength 1.0KV AC RMS 60 Hz
 Insulation Resistance >100M Ω
 Contact Resistance < 20m Ω

Environmental Conditions:

Temperature Range -10 to +60°C

Materials:

Plastic components:
 Polycarbonate, Flame-retardant,
 UL94V-0 rated
 Contact material: Phosphor Bronze
 Contact plating: Flasher with hard
 gold over 100u inches of Nickel



e-mail.....sales@dynacomcorp.com
 31082 San Antonio Street
 Hayward, CA 94544

Dimensions: mm - DO NOT SCALE DRAWING			
NEXT ASSY-	DRAWN: EA	CHECKED: E.A.	
TITLE: 110 Patch Cord Connector, 4 Pair, Cat6	DWG. NO. 610PCC-4	SHEET 1 OF 1	REV. A