

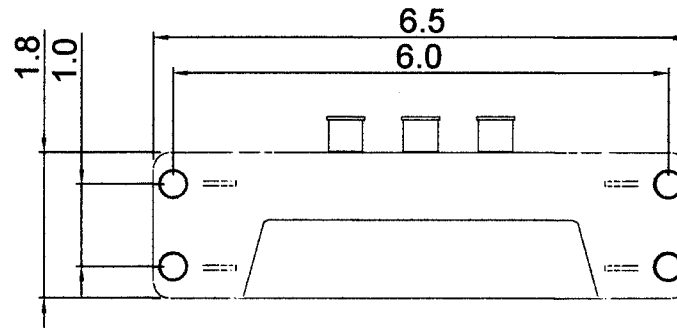


1 2

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

3		4		
ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE		E.A.

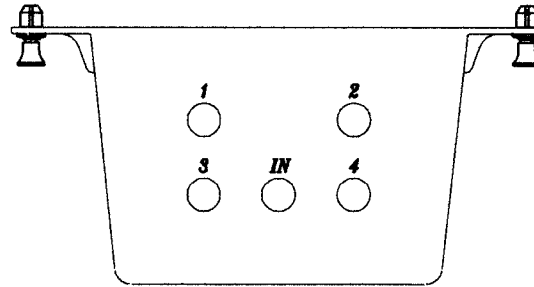

BANDWIDTH MHZ	5-47	47-1000	1000-2050
INSERTION LOSS IN-OUT (dB MAX)	8.5	10.5	10.5
RETURN LOSS INPUT (dB MIN)	10	10	15
RETURN LOSS OUTPUT (dB MIN)	15	12	12
ISOLATION OUT-OUT (dB MIN)	18	18	18

NOTES:

1. FREQUENCY RANGE: 5-2050 MHz






e-mail.....sales@dynacomcorp.com
 Hayward, California
 www.dynacomcorp.com

TOLS. .X=+/- 0.030, .XX=+/- 0.010, .XXX=+/- .005, ANGLES=+/-0.5 DEG.

NEXT ASSY:	DRAWN: E.A. 08/23/2012	CHECKED: -
TITLE: Passive Video Hub 2-GHz Splitter, 1-in 4-out	800-F202-4	REV. A

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE		E.A.

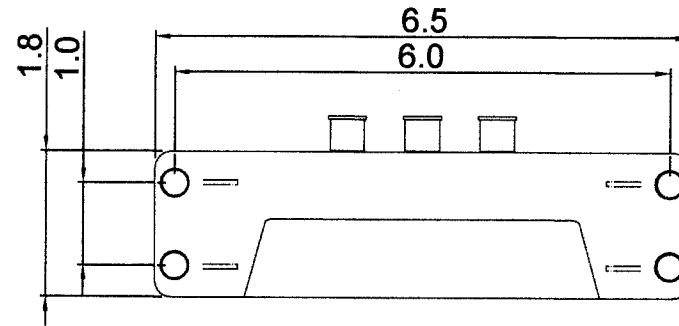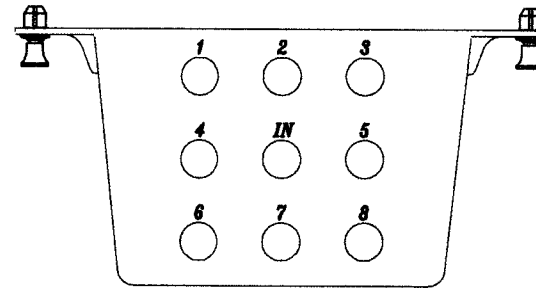

BANDWIDTH MHZ	5-47	47-1000	1000-2050
INSERTION LOSS IN-OUT (dB MAX)	12.5	13.5	17.5
RETURN LOSS INPUT (dB MIN)	10	10	10
RETURN LOSS OUTPUT (dB MIN)	8	10	10
ISOLATION OUT -OUT (dB MIN)	20	20	20

NOTES:

1. FREQUENCY RANGE: 5-2050 MHZ



e-mail.....sales@dynacomcorp.com
Hayward, California
www.dynacomcorp.com

TOLS. X=+/- 0.030, .XX=+/- 0.010, .XXX=+/- .005, ANGLES=+/-0.5 DEG.

NEXT ASSY:	DRAWN: E.A. 08/23/2012	CHECKED: -
TITLE: Passive Video Hub 2-GHz Splitter, 1-in 8-out	800-F202-8	REV. A