
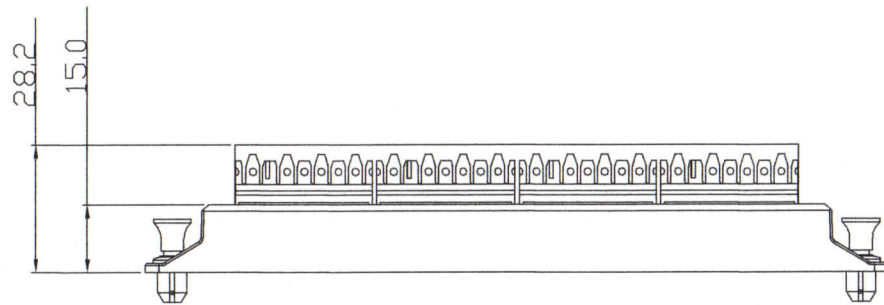


1 2

THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION.

ZONE REV		3	4	DATE	APPV.
-	A	INITIAL RELEASE		12/19/12	E.A.

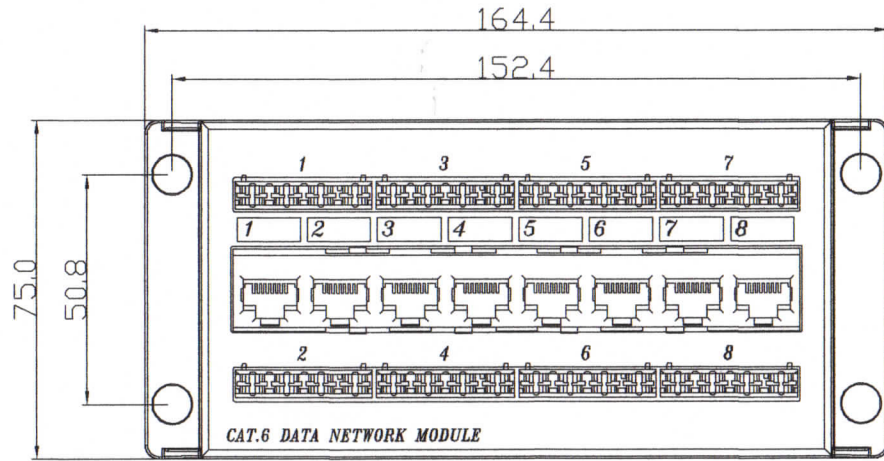



Transmission Performance:  
Meets all requirements specified in Cat.6 channel of TIA/EIA-568-B.2-1

ENVIRONMENTAL CONDITIONS

Temperature Range  
Storage -40 to +70°C  
Operation -10 to +60°C  
Relative Humidity (Operational) : Maximum Noncondensing 93%

ELECTRICAL

Electrical Insulation Resistance : 500 MΩ [min. @ 100V dc  
Dielectric Withstanding Voltage : 1000V dc or a.c. Peak Contact @ 60Hz for 1 minute  
Spring Wire Contact Resistance : 20 mΩ [Max.  
IDC Contact Resistance : 2.5 mΩ [Max.  
Current Rating : as shown



e-mail.....sales@dynacomcorp.com  
web .....www.dynacomcorp.com

DIMENSIONS ARE SHOWN IN MILIMETERS.

NEXT ASSY: -	DRAWN: E.A. 12/19/12	CHECKED: -
<b>Data Cross Connects, Cat6, 8-Port</b>		DWG. NO. <b>800-F306-8</b>
		REV. <b>A</b>