
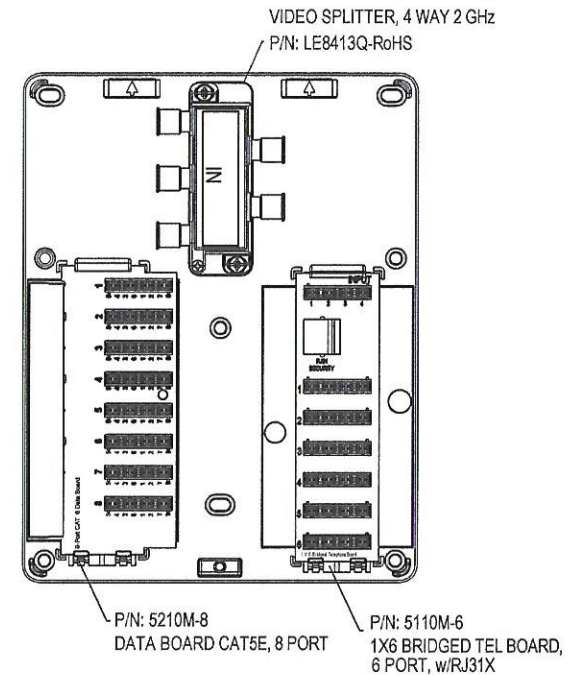
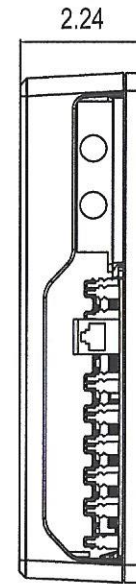
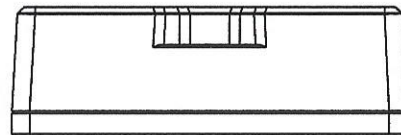



1 THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	12/23/2015	E.A.

NOTES:  
1. ACCESSORY MODULES NOT SOLD SEPARATELY.

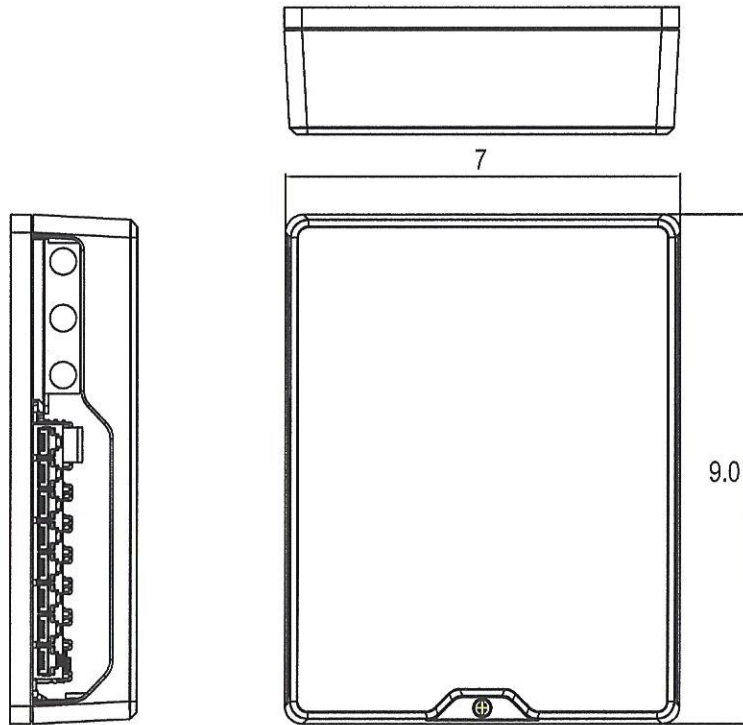

**TRANSMISSION PERFORMANCE**  
Meets all requirements specified in channel requirement of:  
ANSI/TIA-568-C.2, Category 5E.

**ELECTRICAL**  
Electrical Insulation Resistance : 500 M $\Omega$  min. @ 100V d.c  
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute.

**MECHANICAL**  
Insertion / Extraction Life : 750 Cycles Minimum  
IDC Wire Gauge : 22 ~ 24 AWG

**PHYSICAL**  
Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0  
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold  
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy



e-mail....sales@dynacomcorp.com  
www.dynacomcorp.com

TOLS: Inches		DRAWN: EA 12/23/2015		CHECKED: EA	
NEXT ASSY: -		DWG. NO. 860-PA-5E		SHEET 1 OF 1	
TITLE Mini MDU with Modules, Cat5E			REV. A		