


1 THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	12/23/2015	E.A.

NOTES:
1. ACCESSORY MODULES NOT SOLD SEPARATELY.

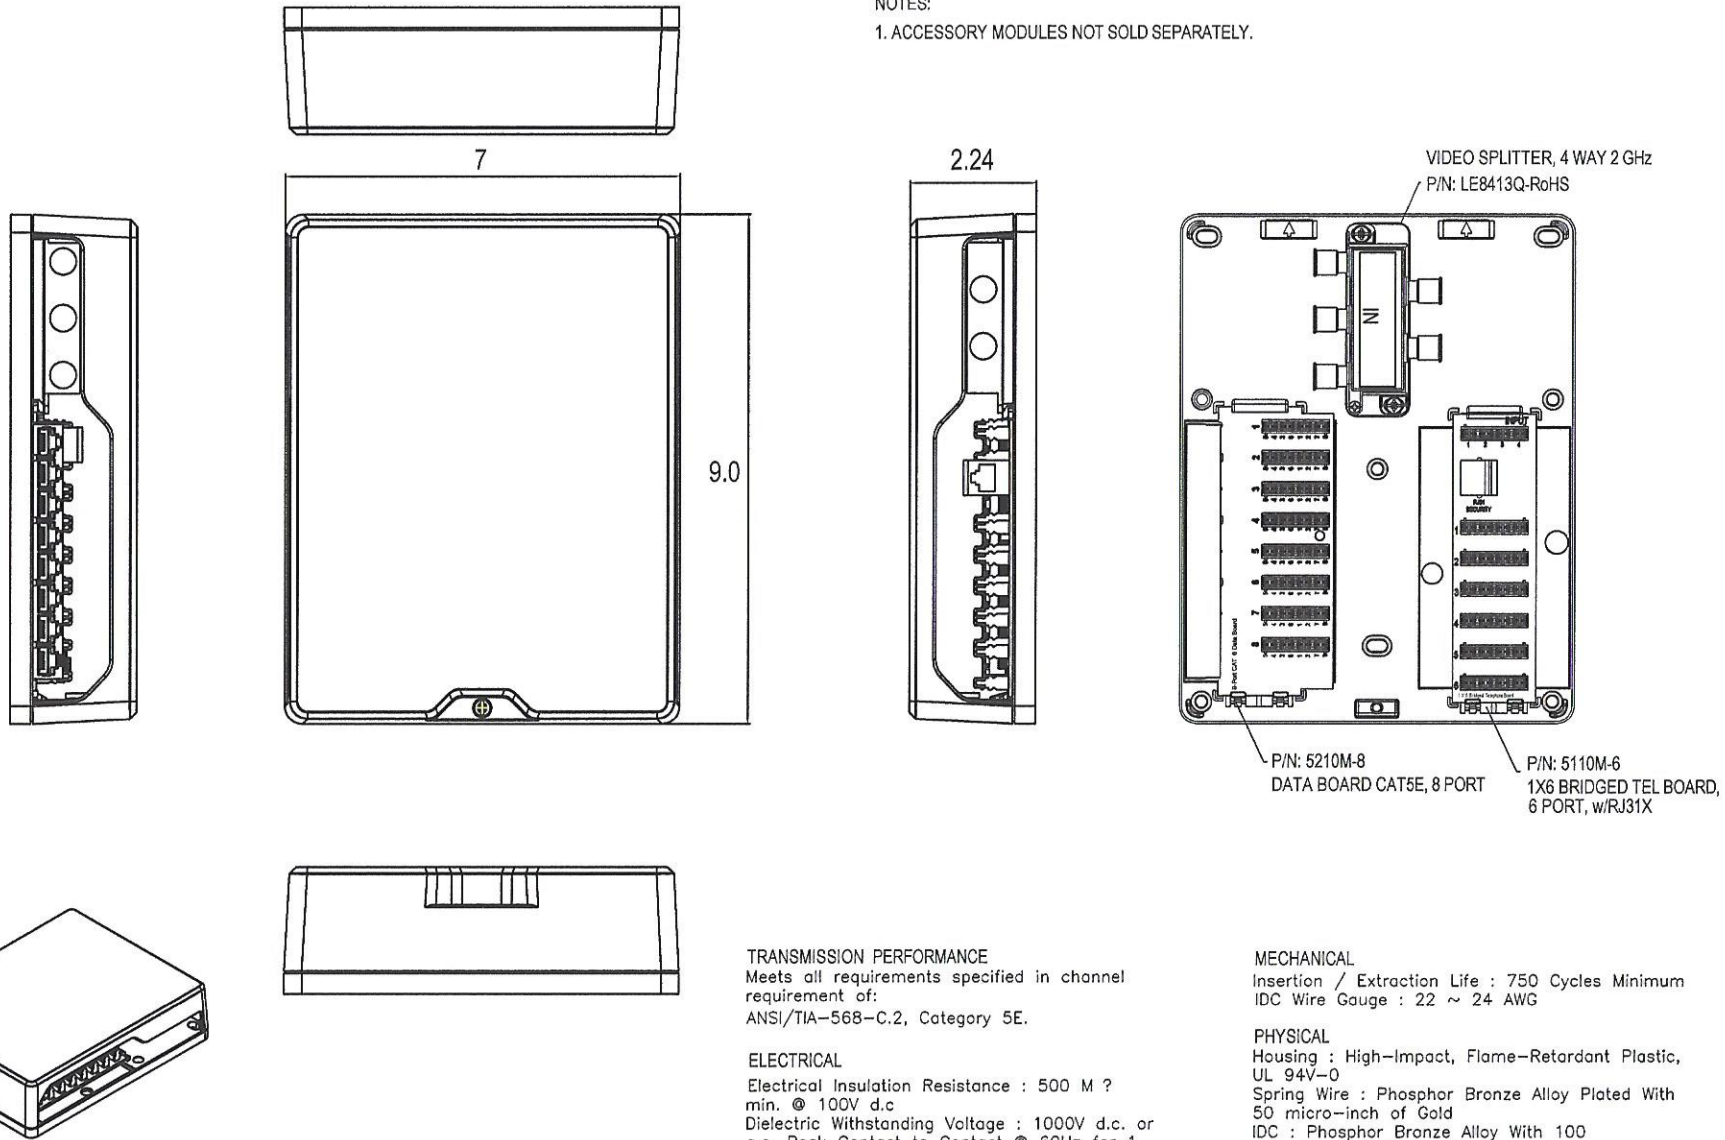

TRANSMISSION PERFORMANCE
Meets all requirements specified in channel requirement of:
ANSI/TIA-568-C.2, Category 5E.

ELECTRICAL
Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute.

MECHANICAL
Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL
Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy








e-mail....sales@dynacomcorp.com
www.dynacomcorp.com

TOLS: Inches		
NEXT ASSY: -	DRAWN: EA 12/23/2015	CHECKED: EA
TITLE	DWG. NO.	SHEET 1 OF 1
Mini MDU with Modules, Cat5E	860-PA-5E	REV. A

1 THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

ZONE	REV.	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	12/23/2015	E.A.

NOTES:
1. ACCESSORY MODULES NOT SOLD SEPARATELY.

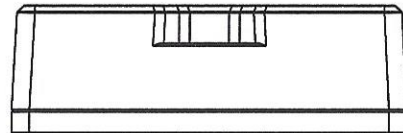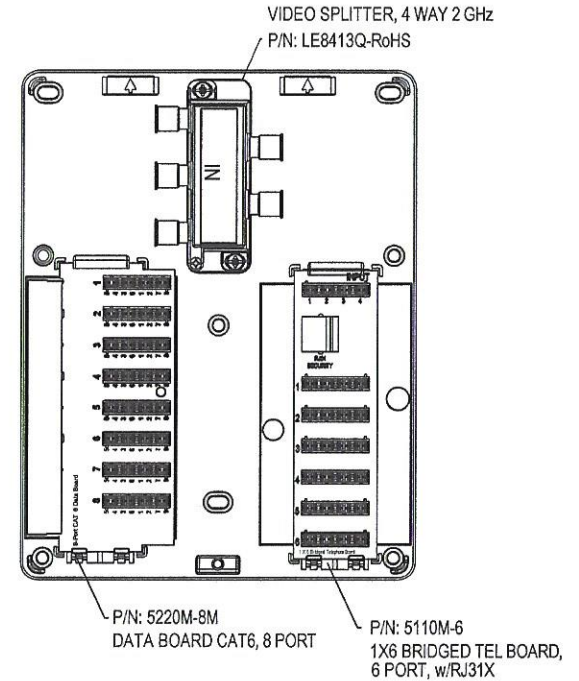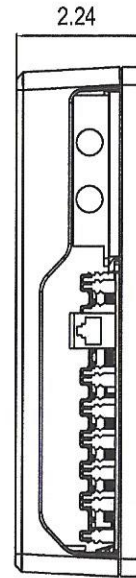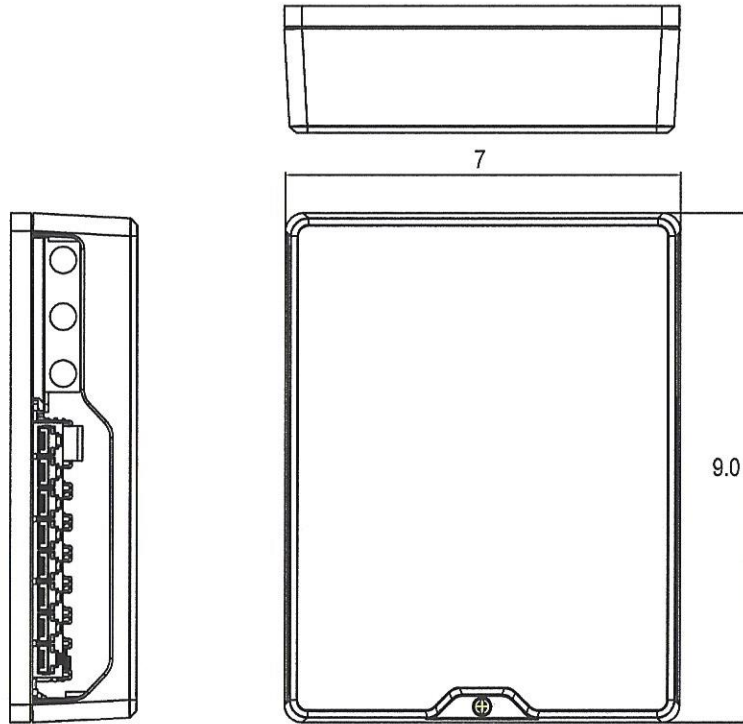

TRANSMISSION PERFORMANCE
Meets all requirements specified in channel requirement of:
ANSI/TIA-568-C.2, Category 6.

ELECTRICAL
Electrical Insulation Resistance : 500 M Ω min. @ 100V d.c
Dielectric Withstanding Voltage : 1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute.

MECHANICAL
Insertion / Extraction Life : 750 Cycles Minimum
IDC Wire Gauge : 22 ~ 24 AWG

PHYSICAL
Housing : High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire : Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC : Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy



e-mail....sales@dynacomcorp.com
www.dynacomcorp.com

TOLS: Inches

NEXT ASSY: -

DRAWN: EA 12/23/2015

CHECKED: EA

TITLE

Mini MDU with Modules, Cat6

DWG. NO.

860-PA-6

SHEET 1 OF 1

REV.

A