
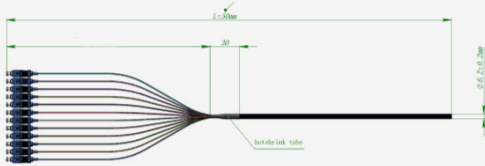



# 910P series Fiber Optic Pigtail

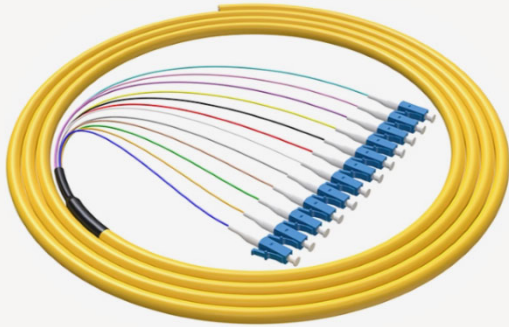

Dynacom fiber optic pigtails utilize premium Corning fiber and high-class Zirconia ferrules for exceptional performance and reliability. All fibers are inspected to ensure stringent quality control. Available in various fiber modes (OS2, OM3, OM4) and customizable options, including connector types and cable lengths, Dynacom pigtails provide reliable and efficient connectivity for demanding fiber optic network applications.

**Features:**

- Low insertion loss and high return loss, ensuring optimal signal transmission.
- Bend insensitive, exceeds ITU-T G.657.A1 \*
- OFNR rated
- Environment Friendly Packaging
- 100% tested

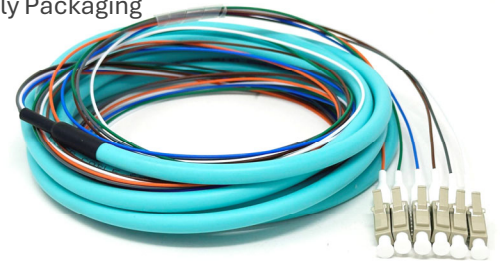

**Specification:**

Glass Fiber	Corning SMF28 Ultra/ ClearCurve
Fiber Grade	OS2: G.657.A1 OM3:IEC 60793-2-10
Cable Type	900 µm Tight-Buffered
Buffer Material	PVC
Color coded	Yes
Jacket Flame Rating	OFNR
Connector Color	OS2 APC: Green; OS2 UPC: Blue; OM3: Gray
Ferrule material	Ceramic zirconia
Length	3 meters
Operating Temperature	14 – 185 degrees Fahrenheit
Minimum Ben Radius	7.5-10 mm
Interchangeability	1,000 Times
Insertion loss	MM≤0.3dB, SM≤0.2dB
Return Loss	UPC≥ 50dB; APC≥60dB

Options	(Accept Customize Order)
Fiber Strand	6 Fiber, 12 Fiber
Mode	OS2, OM3, OM4(optional)
Connector	▪ SC APC    ▪ SC UPC    ▪ LC APC    ▪ LC UPC
Jacket	▪ OFNR    ▪ OFNP(optional)

910PD-06LC2	Pigtail DS, 6F, OS2, LC, 3m, OFNR
910PD-06LC2-GN	Pigtail DS, 6F, OS2, LC APC, 3m, OFNR
910PD-06LC3	Pigtail DS, 6F, OM3, LC, 3m, OFNR
910PD-06SC2	Pigtail DS, 6F, OS2, SC,3m, OFNR
910PD-06SC2-GN	Pigtail DS, 6F, OS2, SC APC, 3m, OFNR
910PD-06SC3	Pigtail DS, 6F, OM3, SC, 3m, OFNR
910PD-12LC2	Pigtail DS,12F, OS2, LC, 3m, OFNR
910PD-12LC2-GN	Pigtail DS,12F, OS2, LC APC, 3m, OFNR
910PD-12LC3	Pigtail DS,12F, OM3, LC, 3m, OFNR
910PD-12SC2	Pigtail DS,12F, OS2, SC, 3m, OFNR
910PD-12SC2-GN	Pigtail DS,12F, OS2, SC APC, 3m, OFNR
910PD-12SC3	Pigtail DS,12F, OM3, SC, 3m, OFNR

\* Single Mode Fiber