


THE INFORMATION CONTAINED HEREON IS PROPRIETARY AND CONFIDENTIAL TO DYNACOM CORPORATION. AND SHALL NOT BE USED OR DISCLOSED, IN WHOLE OR IN PART WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION OF DYNACOM CORPORATION SUBJECT TO CHANGE WITHOUT NOTICE.


ZONE	REV	DESCRIPTION	DATE	APPV.
-	A	INITIAL RELEASE	04/19/2018	E.A.

ITEM	PARAMETER
SLEEVE	ZIRCONIA
INSERTION LOSS	≤ 0.2dB
WAVE LENGTH	850 & 1300nm
MATING DURABILITY (1000 TIMES)	ADDITIONAL LOSS ≤0.1dB
TEMPERATURE STABILITY 0-40C C~ 85 C)	ADDITIONAL LOSS ≤0.2dB
OPERATING TEMPERATURE	-40°C ~+75°C
STORAGE TEMPERATURE	-40°C ~+75°C

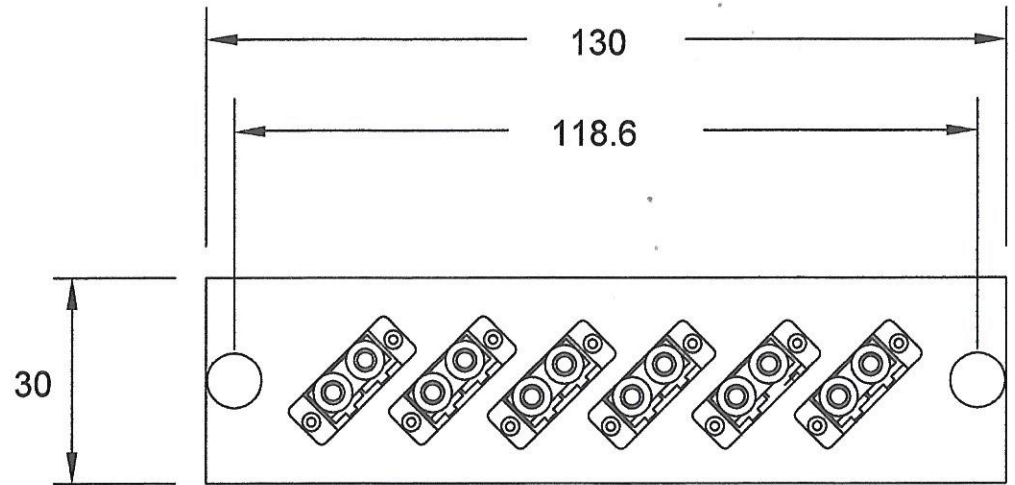

NOTES:

1. PLATE MATERIAL - 1.2MM COLD ROLLED STEEL. FINISH-BLACK POWDER COAT.
2. SNAP PIN P/N: M-533, QUANTITY 2.
3. MULTIMODE LGX STYLE.

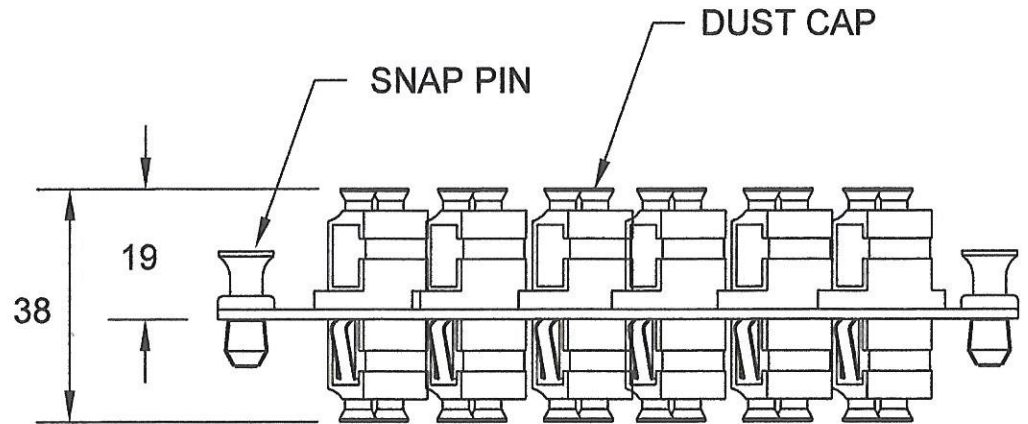

e-mail.....sales@dynacomcorp.com  
Hayward, California

ALL DIMENSIONS ARE IN MM.

NEXT ASSY: -	DRAWN: E.A. 05/20/2018	CHECKED: -
TITLE: 6 Port LC Duplex Adapter Panel		REV. A

920A-LC2-6-AQ